



CABLES BOBINA:



INTELLINET BOBINA UTP CAT 5E 100M MULTIFILIAR GRIS

INTELLINET BOBINA UTP CAT 5E 305M COLOR AZUL

INTELLINET BOBINA UTP CAT 5E 305M COLOR GRIS

INTELLINET BOBINA UTP CAT 5E 305M MULTIFILIAR GRIS

INTELLINET BOBINA UTP CAT 5E 305M COLOR AZUL


INTELLINET BOBINA UTP CAT 5E 305M SOLIDA COLOR GRIS

INTELLINET BOBINA UTP CAT 6 305M SOLIDA COLOR GRIS

enson

ENSON BOBINA UTP CAT 5E LINE ECONOMICA 305MTS COLOR NEGRO

ENSON BOBINA UTP CAT5E LINEA PROF COBRE 305MTS COLOR NEGRA

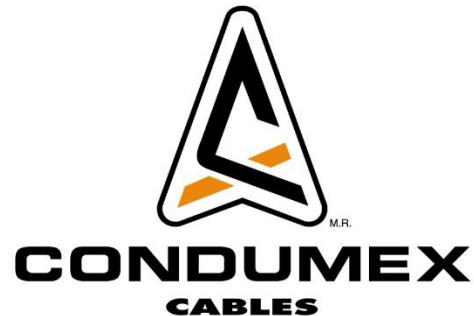

BOBINA UTP5E CONDUMEX CUBIERTA EXT PVC/24 AWG/305 METROS/AZUL

BOBINA UTP5E CONDUMEX CUBIERTA EXT PVC/24 AWG/305 METROS/GRIS

BOBINA UTP5E CONDUMEX P/EXTERIOR RELLENO, 4X2/24, POLIETILENO/100% COBRE 24 AWG/NEGRO,305

MTS BOBINA ULTRACAT 6 CONDUMEX / 4 PARES/AISLA DE POLIETILENO/CUBIERTA DE PVC/23 AWG (CM)/305M/GRIS BOBINA UTP6 CONDUMEX EXTERIOR RELLENO/4X2/23/CUBIERTA EXT.Y AISLA

POLIETILENO/23 AWG/305 MTS/NEGRO

BOBINA PRE ENSAMBLADA COAXIAL PROVISION ISR SIAMES DE 20 METROS

ACCESS POINT:

TP-LINK®

The Reliable Choice



TP-LINK TL-WA701ND, 125 MBIT/S, 10, 100 MBIT/S, 2,4 GHZ, 128-BIT WEP, 152-BIT WEP, 64-BIT WEP, SSID, TKIP, WPA, WPA-PSK, WPA2, WPA2-PSK, WPS, 0 - 40 °C, -4



TP-LINK TL-WA830RE V2, 10/100BASE-T(X), IEEE 802.11B, IEEE 802.11G, IEEE 802.11N, 300 MBIT/S, 3W, 9V, 0,6A



TP-LINK TL-WA5210G, 54 MBIT/S, 2.4/2.4835 GHZ, DBPSK, DSSS, OFDM, QPSK, 128-BIT WEP, 64-BIT WEP, WPA, WPA-AES, WPA-PSK, WPA2, WPA2-PSK, RP-SMA, 12 DBI

TP-LINK TL-WA7210N, 150 MBIT/S, 10,100 MBIT/S, 2.4 - 2.4835, ETHERNET (RJ-45), 128-BIT WEP, 152-BIT WEP, 64-BIT WEP, WPA, WPA-PSK, WPA2, WPA2-PSK, 12 DBI



TP-LINK TL-WA901ND, 300 MBIT/S, 2,4 GHZ, 10, 100 MBIT/S, 128-BIT WEP, 152-BIT WEP, 64-BIT WEP, WPA, WPA-PSK, WPA2, WPA2-PSK, 4 DBI, 12VDC / 1.0A

LINKSYS®

A Division of Cisco Systems, Inc.



LINKSYS LAPN600, 1000 MBIT/S, 10, 100, 1000 MBIT/S, 600 MBIT/S, SNMP, IPV6, 802.1X RADIUS, WEP, WPA, WPA2



LINKSYS LAPN300, 1000 MBIT/S, 10, 100, 1000 MBIT/S, 300 MBIT/S, SNMP, IPV6, 802.1X RADIUS, WEP, WPA, WPA2



LINKSYS WAP300N, 300 MBIT/S, 10, 100 MBIT/S, 2.4/5 GHZ, LAN, WLAN, WEP, WPA2, R-SMA

EnGenius®



ENGENIUS ENS202EXT, 300 MBIT/S, 10, 100 MBIT/S, 2,4 GHZ, LAN, WLAN, 802.1X RADIUS, WPA, WPA2, 802.1X RADIUS



ENGENIUS EAP600, 1000 MBIT/S, 10, 100, 1000 MBIT/S, 2.4/5 GHZ, SNMP V1, V2C, V3, 128-BIT WEP, 64-BIT WEP, 802.1X RADIUS, SSID, WPA-EAP, WPA-TKIP, RADIUS



ENGENIUS ECB600, 300 MBIT/S, 10, 100, 1000 MBIT/S, 2.412 - 2.484, 5.5 - 5.7, 5.745 - 5.825 GHZ, 802.1X RADIUS, WPA, WPA-EAP, WPA-PSK, WPA2, 802.1X RADIUS



CISCO WAP321, 300 MBIT/S, 2.4 - 5 GHZ, 32 USUARIO(S), 5E, WI-FI, WEP, WPA, WPA2



HEWLETT PACKARD ENTERPRISE MSM410 E, 54 MBIT/S, 2,4 GHZ, 10, 100, 1000 MBIT/S, SNMP V2C, SNMP V3, MIB-II, RADIUS AUTHENTICATION CLIENT MIB (RFC 2618), 802.

D-Link®



D-LINK AIRPREMIER DAP-2310, 1000 MBIT/S, 10, 100, 1000 MBIT/S, 2.4 - 2.485 GHZ, SNMPV1, V2C, V3, TELNET, RJ-45



D-LINK DAP-1320, IEEE 802.11B, IEEE 802.11G, IEEE 802.11N, 300 MBIT/S, 2,4 GHZ, 110-240V, 50/60 HZ, 0 - 40 °C



D-LINK DAP 2690, 300 MBIT/S, FCC, CE, IC, CSA, WI-FI, 128-BIT WEP, 64-BIT WEP, 802.1X RADIUS, SSID, WPA-PSK, WPA2-PSK, WPA, WPA2L, WPA2TM, WEP, SSID

ANTENAS:

TP-LINK®

The Reliable Choice



TP-LINK 2.4GHZ 8DBI INDOOR OMNI-DIRECTIONAL ANTENNA, 8 DBI, 2.4, OMNI-DIRECTIONAL, -10 - 60 °C, -40 - 80 °C, 10 - 90%



TP-LINK 2.4GHZ 24DBI GRID PARABOLIC ANTENNA, 24 DBI, 50 OHMIO, CIRCULAR, 3,5 KG, 100 CM, 0 MM



TP-LINK 2.4GHZ 8DBI INDOOR DESKTOP OMNI-DIRECTIONAL ANTENNA, 8 DBI, 2.4, 50 OHMIO, -10 - 60 °C, -40 - 80 °C



TP-LINK 2.4GHZ 9DBI OUTDOOR DIRECTIONAL ANTENNA, 9 DBI, 2,4 GHZ, 50 OHMIO, -10 - 60 °C, -40 - 80 °C, 10 - 90%



TP-LINK TL-ANT5823B, 23 DBI, 5.15 - 5.85 GHZ, DIRECTIONAL, 100W, 32 CM, 2 CM

Tenda[®]



TENDA Q2405, 5 DBI, IEEE 802.11B, IEEE 802.11G, IEEE 802.11N, 2,4 GHZ, 150G, 50 X 50 X 220 MM

RACK:



INTELLINET 167628, MONTADO EN LA PARED, 48,26 CM (19"), 480 X 300 X 80 MM, 4U



INTELLINET 674805, NEGRO, INDEPENDIENTE, 48,26 CM (19")



INTELLINET 203845, NEGRO, MONTADO EN LA PARED, 60 KG, 600 X 450 X 751 MM, 15U



INTELLINET 710213, NEGRO, 300 KG, 48,26 CM (19"), 515 X 820 X 1956 MM



NORTH SYSTEM NORTH005-BKL, 21U, NEGRO, INDEPENDIENTE, 51,015 CM, 36,2 CM, 122,3 CM

CHAROLA:



INTELLINET 206525, NEGRO, 80 KG, 48,26 CM (19"), 55 CM



EXPANSOR DE RED:

TP-LINK®

The Reliable Choice



TP-LINK AC750, 10/100BASE-T(X), IEEE 802.11AC, IEEE 802.11B, IEEE 802.11G, IEEE 802.11N, 802.11B, 802.11G, 802.11N, 3,5W, LAN (RJ-45), COLOR BLANCO

LINKSYS®

A Division of Cisco Systems, Inc.



LINKSYS RE1000, 300 MBIT/S, 10, 100 MBIT/S, 2,4 GHZ, 10/100BASE-T, ETHERNET (RJ-45), AC/DC

PRINT SERVER:

TP-LINK®

The Reliable Choice



TP-LINK SINGLE PARALLEL PORT FAST ETHERNET PRINT SERVER, ETHERNET LAN, IEEE 802.3, TCP/IP, IPX/SPX, NETBEUI, APPLE TALK, LPR, IPP/SMB, RAW, TCP, 0 - 50 °C



TP-LINK SINGLE USB2.0 PORT FAST ETHERNET PRINT SERVER, ETHERNET LAN, IEEE 802.3, IEEE 802.3U, TCP/IP, IPX/SPX, NETBEUI, APPLE TALK, LPR, IPP/SMB, RAW, TCP